Mass =28.8g Max



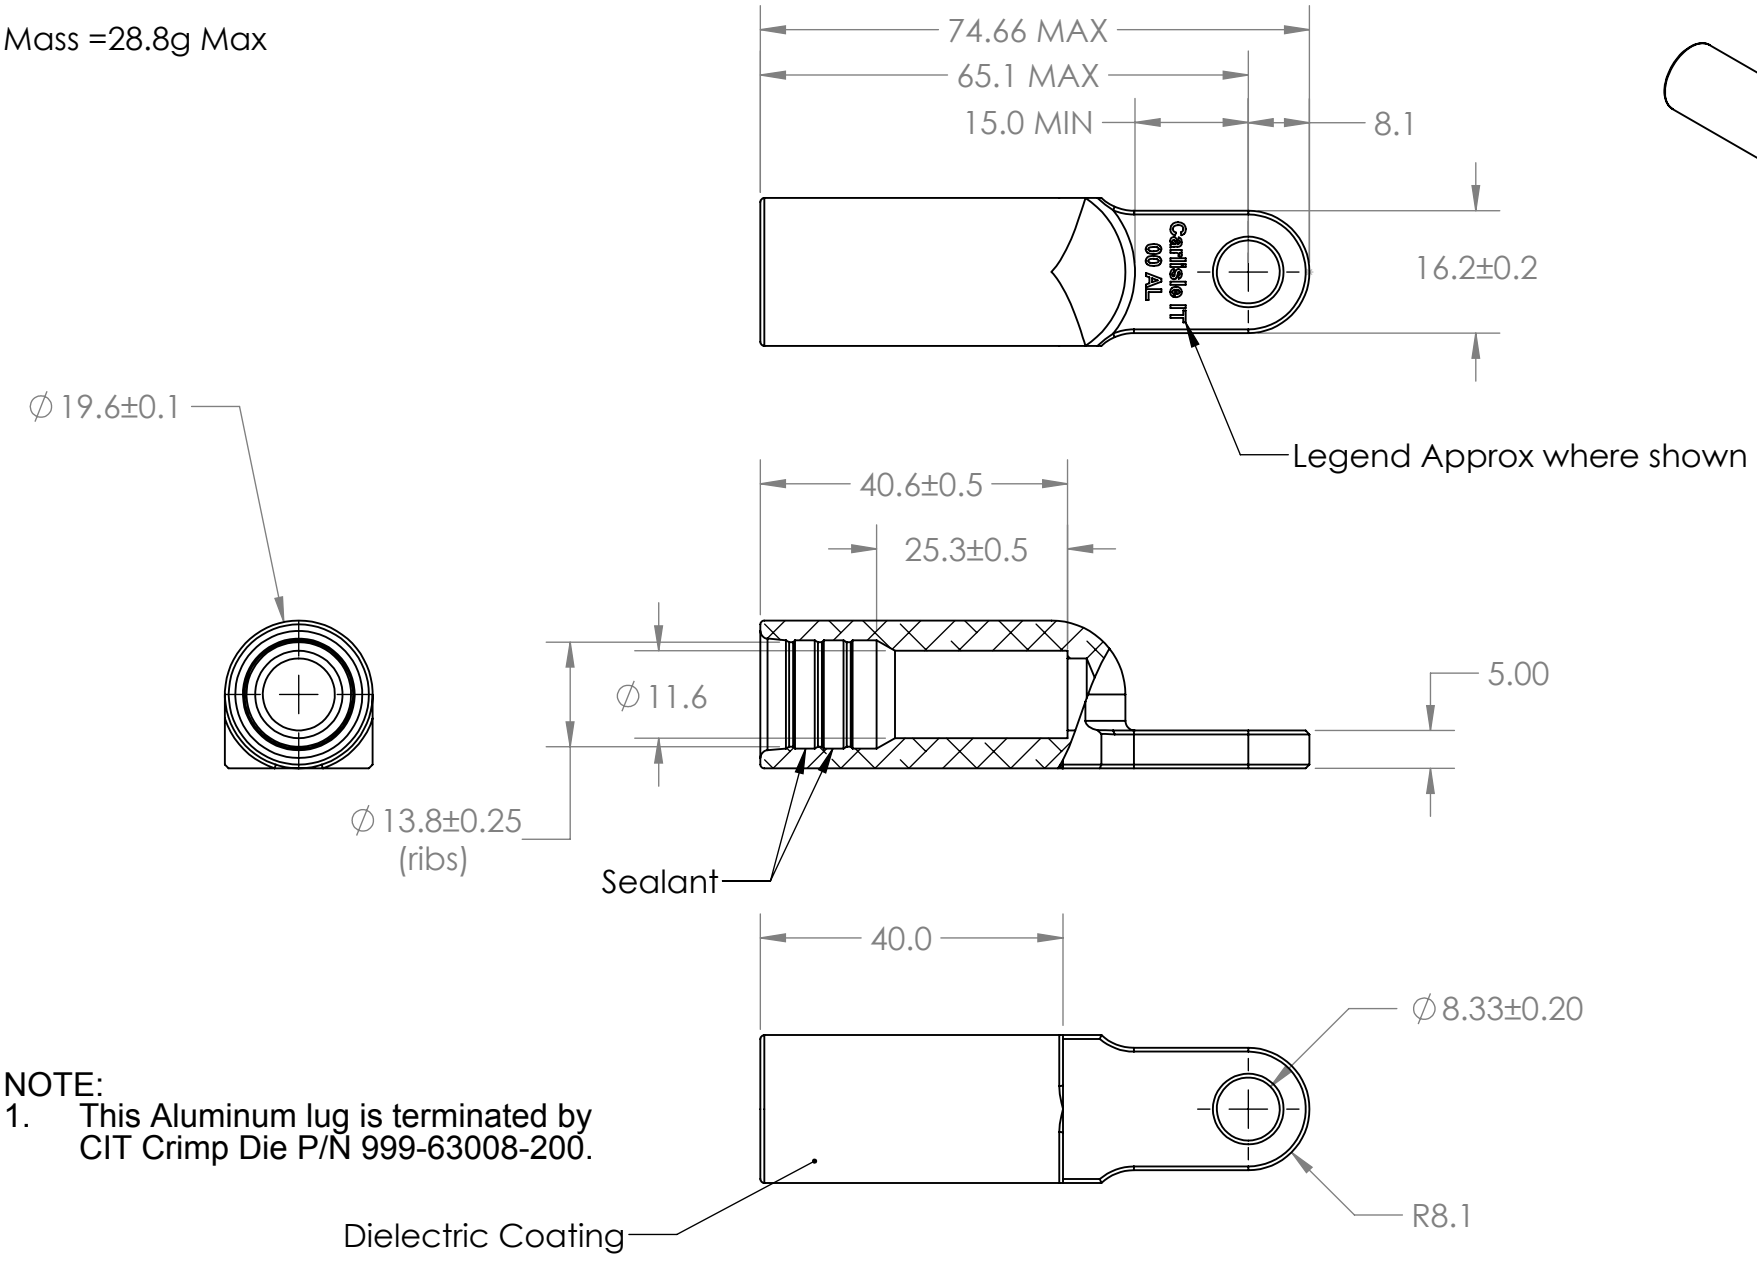

NOTE:
1. This Aluminum lug is terminated by CIT Crimp Die P/N 999-63008-200.

	ALUMINUM		NICKEL					DIMENSIONS IN INCHES THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLES ±2° WHOLE NUMBERS ±0.5 One Place Decimals ±0.25 Two Place Decimals ±0.10			DESIGN, CONFIGURATION AND MECHANICAL FEATURES REVEALED ON THIS DRAWING ARE THE SOLE PROPERTY OF TENSOLITE A CARLISLE COMPANY AND ARE NOT TO BE DISCLOSED TO OTHER PARTIES WITHOUT EXPRESS CONSENT AND APPROVAL OF TENSOLITE.	
				IR	ORIGINATED	2/25/2016	MB				
MAT'L CODE	MATERIAL DESCRIPTION	FIN CODE	FINISH DESCRIPTION	REV	E.C.O. NO.	DATE	APPR	DRAW	WLA	09/10/2014	
								ENG.	WLA	09/10/2014	

Tensolite
A CARLISLE Company
100 Tensolite Dr.
St. Augustine Fl. 32092

DESCRIPTION: Aluminum Lug 00, 1 hole

PG. 1 OF 1

FSCM. 92607

NO. 695-18106-001